



www.genosgarage.com


REMOVE & REPLACE

MOPAR 55112305AD

Cowl Top w/Window Seal and Hood Seals



REMOVE:

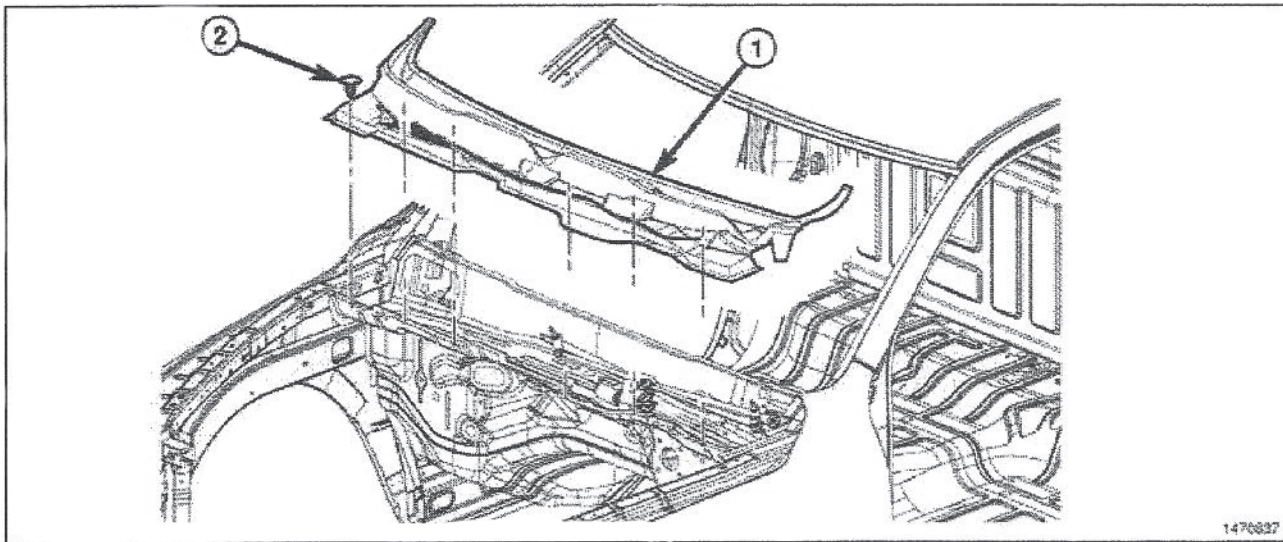

Courtesy of CHRYSLER GROUP, LLC

1. Remove the wiper arms. Refer to ARM, WIPER, REMOVAL .
2. Remove the push pins (2) that secure the front of the cowl cover (1) to the dash panel.
3. Pull the cowl cover forward to disengage the hooks from the windshield.
4. If necessary, remove the washer hose from the cowl cover.

Go to the next page for INSTALLATION instructions.



If you need more assistance, we are only a phone call away.

(770) 886-2500

Monday–Friday
8:30am–5:30pm EST

www.genosgarage.com

GENO'S GARAGE, INC.
1150 Samples Industrial Drive
Cumming, Georgia 30041




www.genosgarage.com

REMOVE & REPLACE

MOPAR 55112305AD

Cowl Top w/Window Seal and Hood Seals

REPLACE (INSTALL)

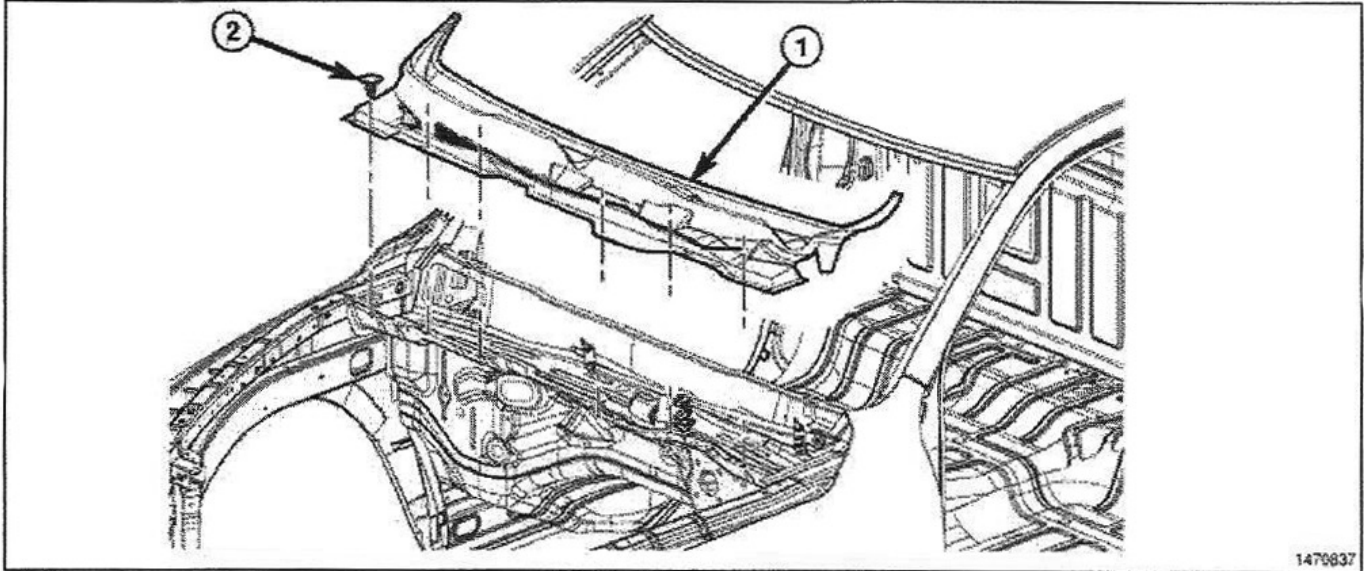

Courtesy of CHRYSLER GROUP, LLC

1. Position the panel assembly cowl cover (1) over the pivot shafts.
2. Push down on the cowl cover while moving it forward to make sure the six hooks are forward of the windshield edge.
3. Center cowl cover over the wiper pivot shafts, push down on the cowl cover then push rearward with both hands and slide hooks under the edge of the windshield.
4. Secure the front edge to the cowl by installing the push pins (2).
5. Fit soft rubber ends to fender by pulling up molded in feature to engage to fender flange.
6. Install the wiper arms. Refer to ARM, WIPER, INSTALLATION .



If you need more assistance, we are only a phone call away.

(770) 886-2500

Monday-Friday
8:30am-5:30pm EST

www.genosgarage.com

GENO'S GARAGE, INC.
1150 Samples Industrial Drive
Cumming, Georgia 30041